

OTUK Row (Shown Before Interleaved Transmission)

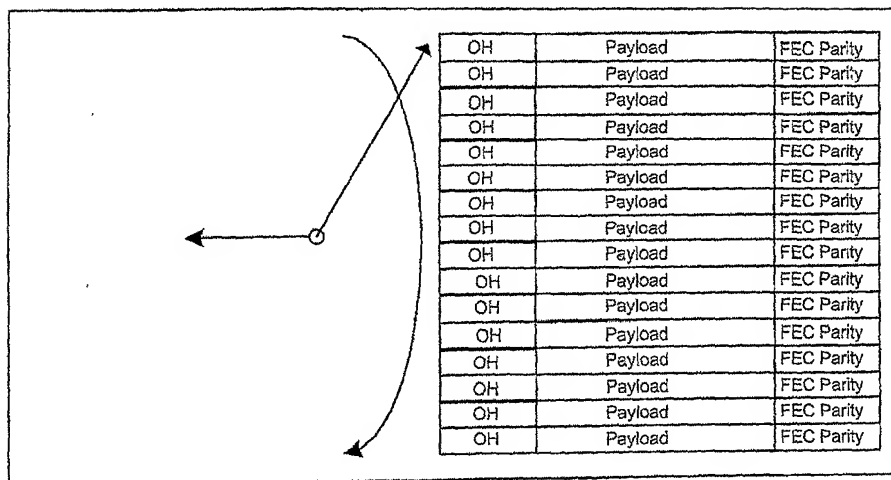


Fig. 2a

OTUK Row (Shown After Interleaved Transmission)


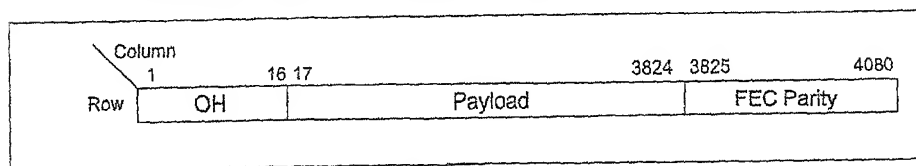


Fig. 2b

# Figure 2c

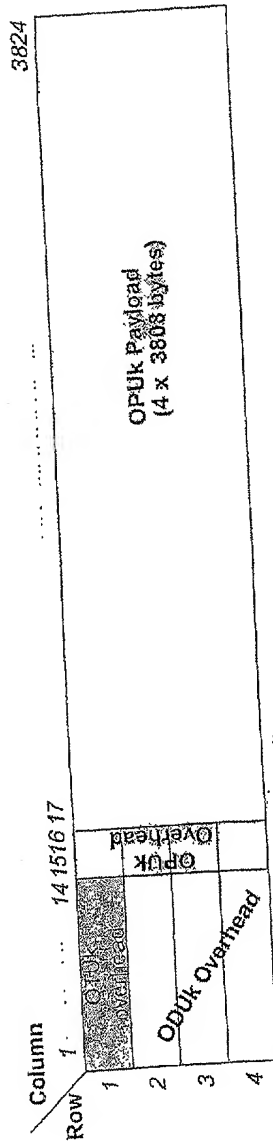

Row #	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	Frame Alignment bytes				MFAS				SM				RES			
	RES				TCM ACT				TCM6				TCM5			
	TCM3				TCM2				TCM1				PM			
	GCC1				GCC2				APS/PCC				RES			

- MFAS: Multi Frame Alignment Signal
- SM: Section Monitoring
- TCM: Tandem Connection Monitoring
- PM: Path Monitoring
- SAPI: Source Access Point Identifier
- DAPI: Destination Access Point Identifier
- RES: Reserved for future standardization
- ACT: Activation/deactivation control
- FTFL: Fault Type & Fault Location
- EXP: Experimental
- GCC: General Communication Channel
- APS: Automatic Protection Switching
- PCC: Protection Communication Control
- BIP8: Bit Interleaved Parity - level 8
- BEI: Backward Error Indication
- BDI: Backward Defect Indication
- IAE: Incoming Alignment Error
- STAT: Status
- PSI: Payload Structure Identifier
- PT: Payload Type
- JC: Justification Control
- NJO: Negative Justification Overhead
- PJO: Positive Justification Overhead
- TTI: Trail Trace Identifier
- ESI: Error/Status Indication

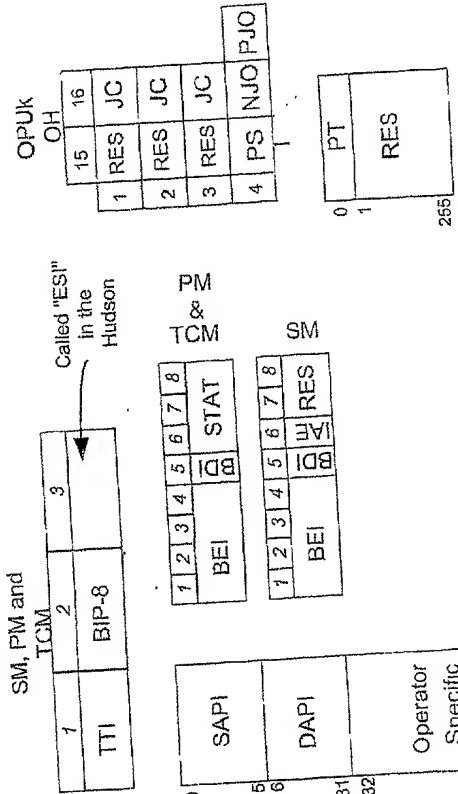


Fig. 2c

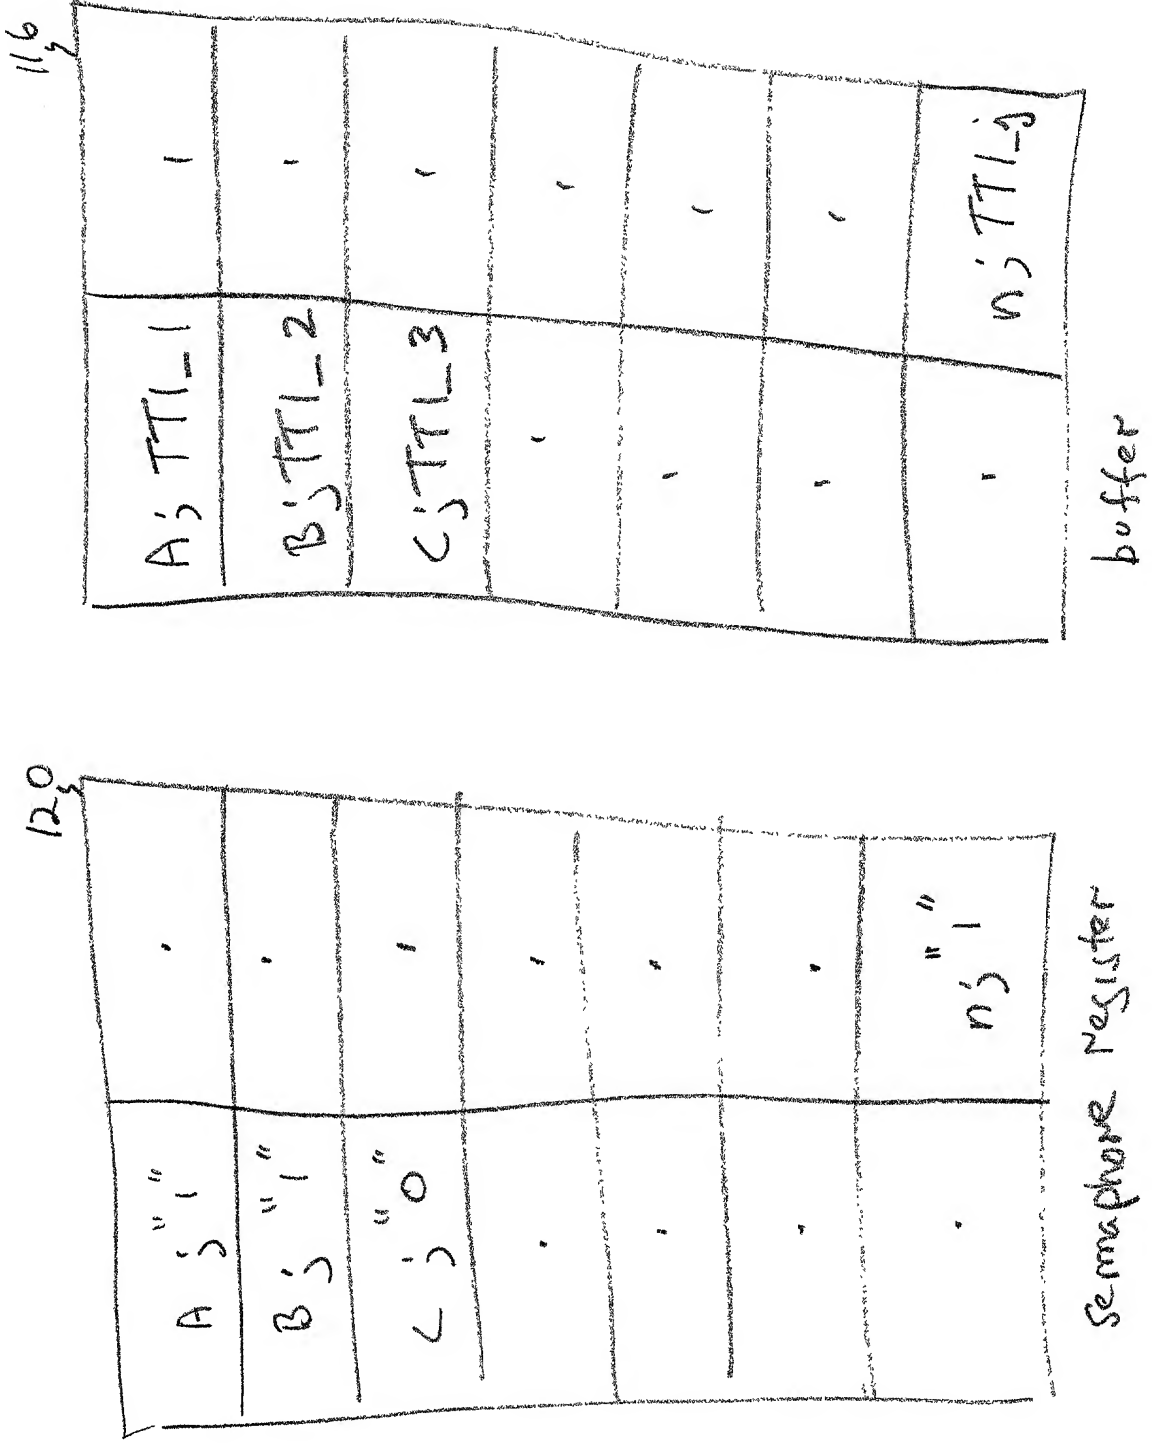


Fig. 3

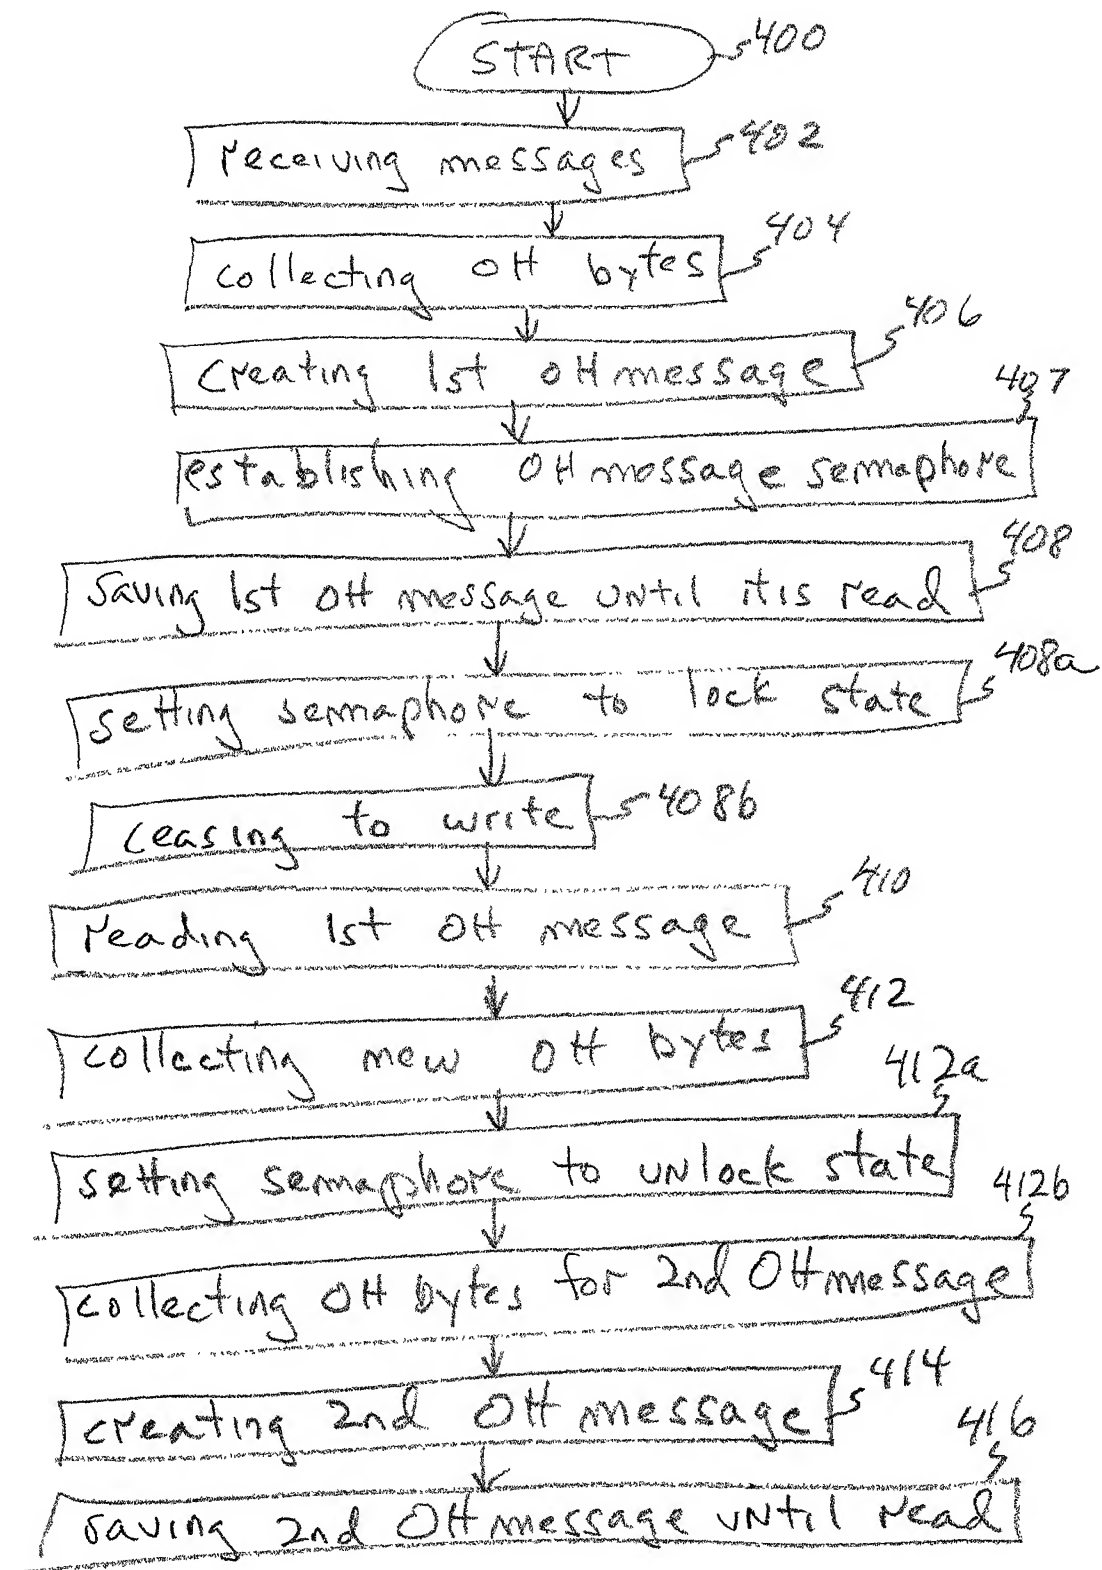


Fig. 4

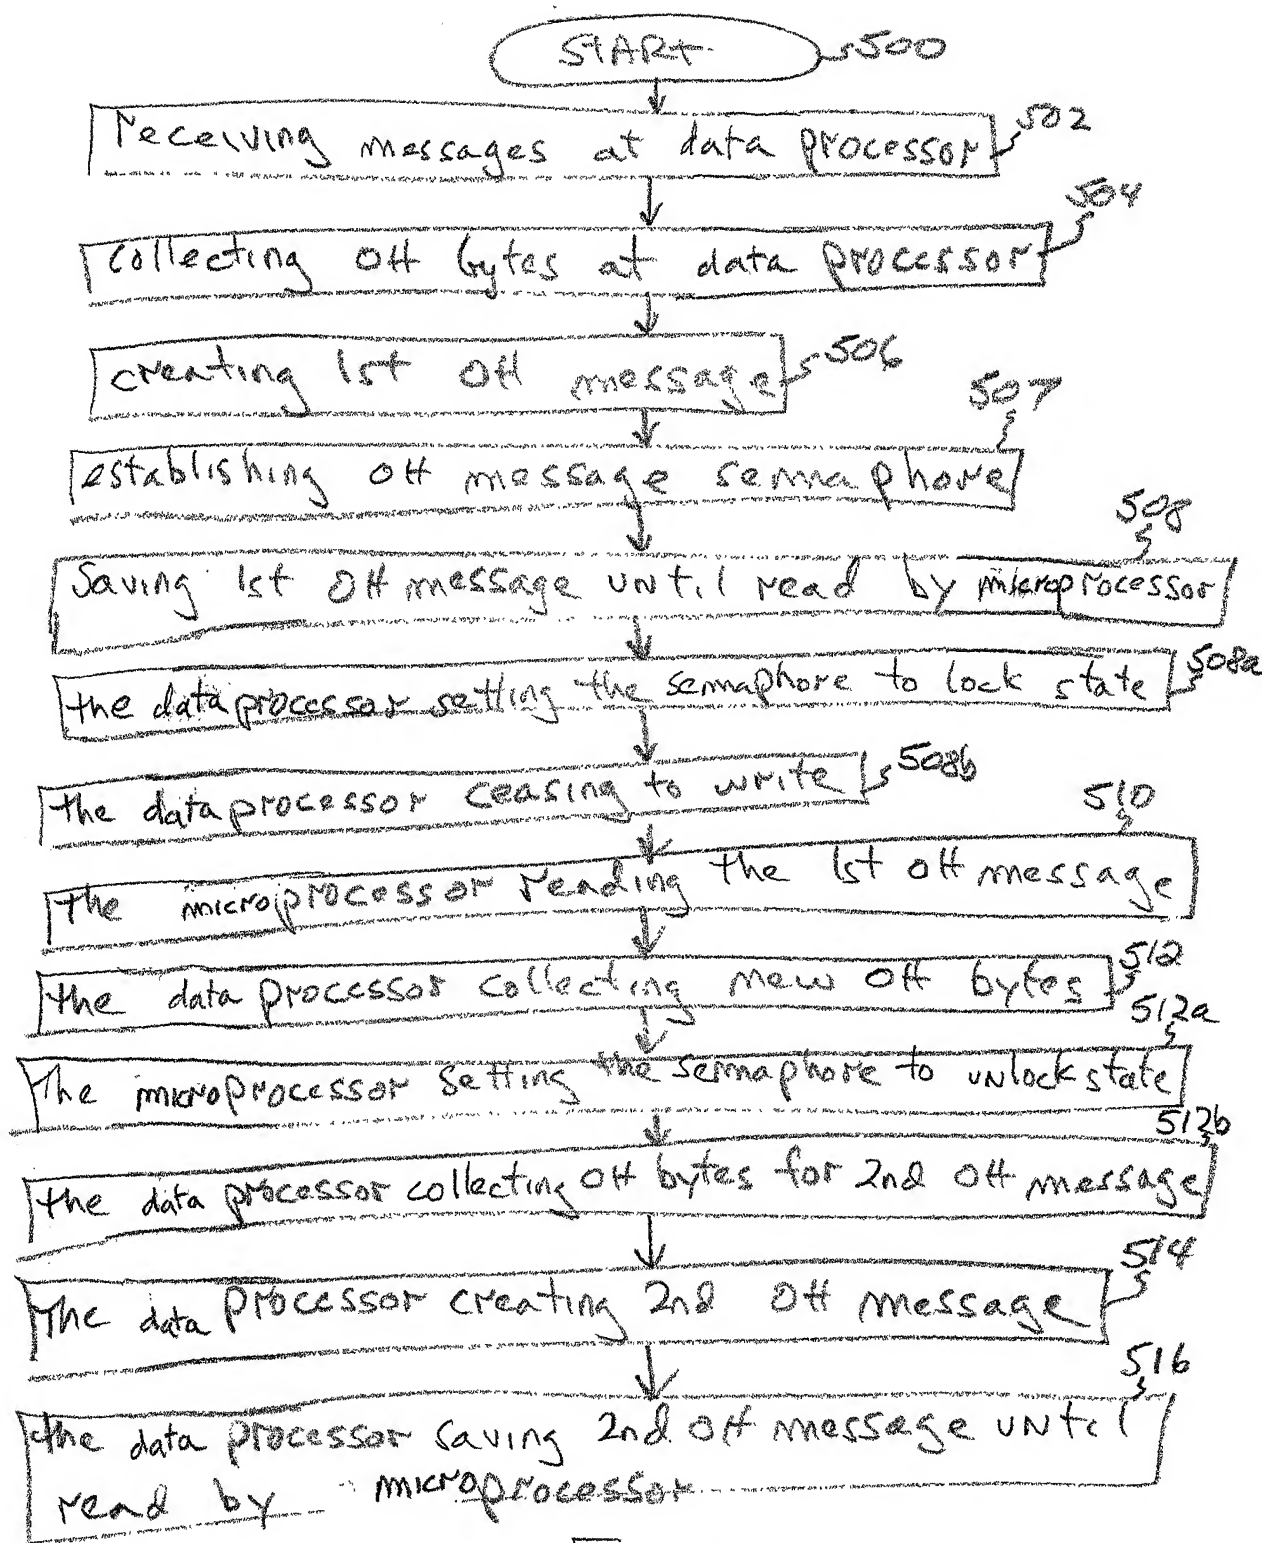


Fig. 5